
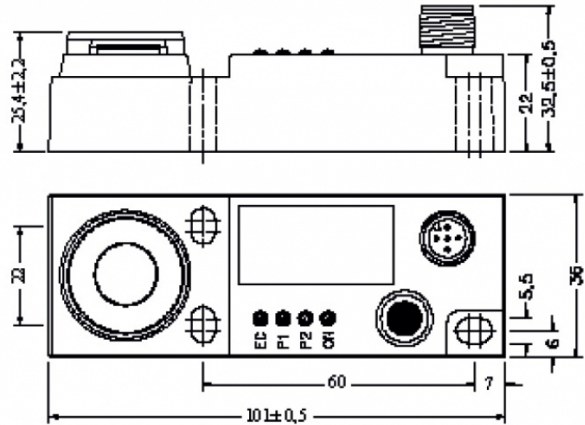


[Article Page](#)

Product Description


ultrasonic sensor

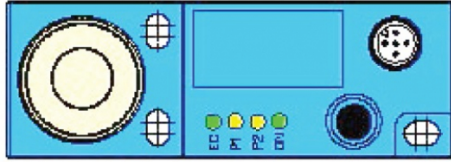

Name
Order number
Mounting

KURT2000-Q100KB-ANU-V2
08400834063


Switch type

 shielded

Signal Type
Connection

 analog
Analog Voltage

Dimension (in mm)
Technical Specification

 Connector
36 x 32.5 x 101

Operating voltage
Max. load current
Operating temperature
Repeat accuracy

15 - 30 V DC
40 mA
-15 ° C to 70 ° C
+/- 2mm|+/-0,2 %

Linearity
Switching state

< 0,3 %
LED
Pulso_has10-10V

Analog output
Time delay

250 ms

Sound beam

ca. 8

Pulse rate of rise

teach in

Measuring range

20-200 cm

Short-circuit proof

yes

Overload protection

yes

Reverse voltage protection

yes

Protection category

IP67

EMC-level

DIN EN 60947-5-7:2004-06/DIN EN 60947-5-2:2008

Housing material

Plastic

Termination

Connector M12 5pol

Errors and omissions exceptet