


[Article Page](#)

Product Description


ultrasonic sensor

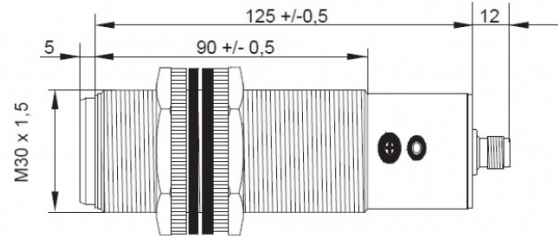

Name
Order number
Matchcode
Switch type


KURT2500-M30KB106-ANU-V2
08409861363
9986-1363

Signal Type
Connection

 analog
Analog Voltage

Connection diagramm

 Connector

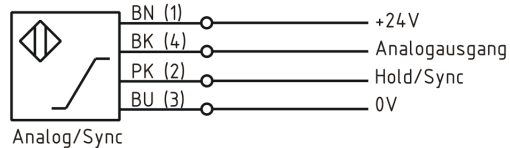

Dimension (in mm)
Technical Specification
Signal type
Operating voltage
No load current
Operating temperature
Repeat accuracy
Linearity
Analog output
Time delay
Carrier frequency
Sound beam
Pulse rate of rise
Measuring range
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Termination
Inhibit
Synchronisation
Enable

M30 x 130
Taster
18 - 30 VDC
35 mA
-15 ° C to 70 ° C
0,2 %
0,3 %
Pulso_has10-10V
200 ms
130 kHz
ca. 8°
fix
30-250 cm
yes
yes
IP67
DIN EN 60947-5-7:2004-06
Plastic
Connector M12 4pol
Pink -> 0V
Pink -> Pin2
Pink not connected



KURT2500-M30KB106-ANU-V2

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Errors and omissions exceptet