


[Article Page](#)

Product Description


ultrasonic sensor

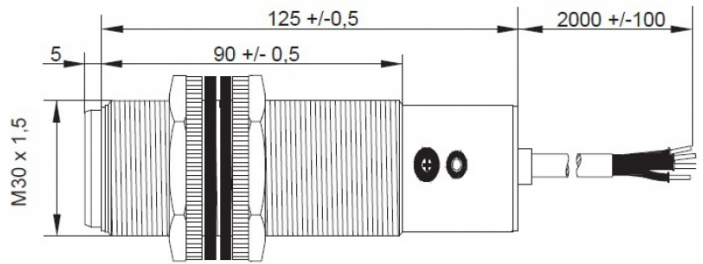


Name
Order number
Matchcode
art_schaltabstand_einstellbar
Switch type

KURT2500-M30KB106-DPS
08409861200
9986-1200
yes


Signal Type
Connection

 N.O.
DC PNP

Connection diagramm

 Cable

Dimension (in mm)
Technical Specification
Signal type
Operating voltage
Max. load current
Switching frequency
Switching hysteresis
Operating temperature
Repeat accuracy
Switching state
Carrier frequency
Sound beam
Measuring range
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Termination
Inhibit

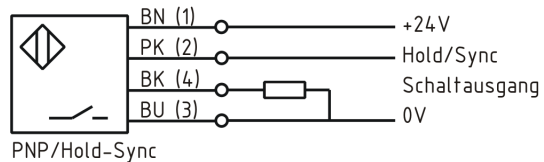

PNP/hold-Sync
M30 x 130

Background suppression sensor
18 - 30 VDC
500 mA
1 Hz
2 %
-15 ° C to 70 ° C
0,2 %
LED
130 kHz
ca. 8°
30-250 cm
yes
yes
yes
IP67
DIN EN 60947-5-2:2008
Plastic
2 m cable 4 pole
Pink -> 0V



KURT2500-M30KB106-DPS

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Synchronisation
Enable

Pink -> Pin2
Pink not connected

Errors and omissions exceptet