


[Article Page](#)

Product Description

ultrasonic sensor

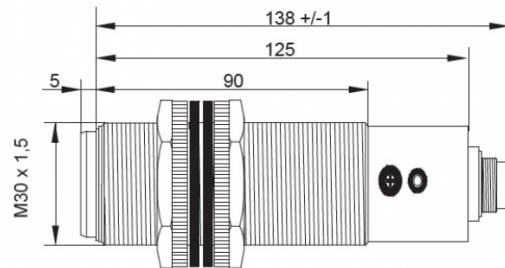


Name
Order number
Matchcode
art_schaltabstand_einstellbar
Connection

KURT3000-M30EB138-ANU-DPA-RS
08409667000
9966-7000
yes

Connection diagramm

Connector

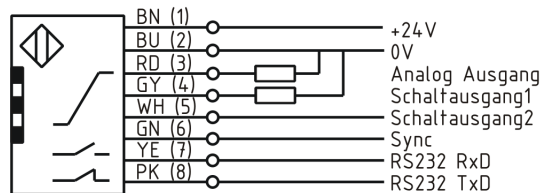

Technical Specification

Signal type
Operating voltage
Max. load current
Operating temperature
Repeat accuracy
Linearity
Switching state
art_schnittstelle
Analog output
Time delay
Carrier frequency
Sound beam
Pulse rate of rise
Measuring range
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Termination

Taster
19 - 30 VDC
100 mA
-15 ° C to 70 ° C
0,4 %
0,5 %
LED
RS232
Pulso_has1
100 ms
130 kHz
ca. 8
programmierbar
35-300 cm
yes
yes
yes
IP65
DIN EN 60947-5-7:2004-06/DIN EN 60947-5-2:2008
Stainless steel V2A
Connector 8pol, type Binder 680

Errors and omissions exceptet