



[Article Page](#)

Product Description

ultrasonic sensor

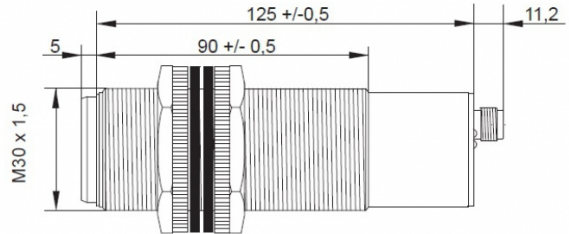


Name  
Order number  
Matchcode  
art\_schaltabstand\_einstellbar  
Switch type  
  
Signal Type  
Connection

KURT3500-M30KB125-ANU-DPA-V2  
08409862563  
9986-2563  
yes  
 analog/digital  
0-10V PNP

Connection diagramm

 Connector

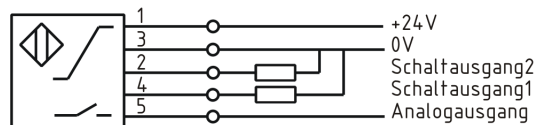

M30 x 128,5

Dimension (in mm)  
Technical Specification  
Signal type  
Operating voltage  
Max. load current  
No load current  
Switching frequency  
Switching hysteresis  
Operating temperature  
Repeat accuracy  
Linearity  
Operating state  
Switching state  
Analog output  
Time delay  
Carrier frequency  
Sound beam  
Pulse rate of rise  
Measuring range  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Housing material

Taster  
19 - 30 VDC  
100 mA  
25 mA  
0,8 Hz  
1 %  
-15 ° C to 70 ° C  
+/- 0,4% | +/- 2mm  
0,5 %  
LED  
LED  
Pulso\_has1  
500 ms  
130 kHz  
ca. 8  
teach in  
35-350 cm  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-7:2004-06/DIN EN 60947-5-2:2008  
Plastic



## KURT3500-M30KB125-ANU-DPA-V2

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Termination

Connector M12 5pol

**Errors and omissions exceptet**