


[Article Page](#)

Product Description

ultrasonic sensor

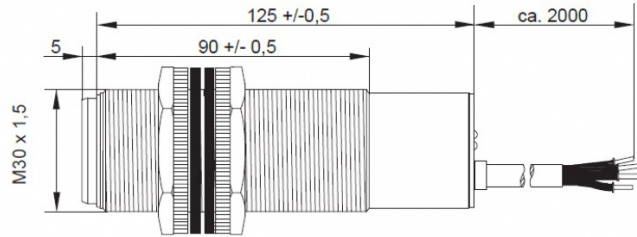

Name

KURT3500-M30KB125-ANU


Order number

08400830300

Matchcode

9983-0300


Switch type

 analog


Analog Voltage

Signal Type

Connection

 Cable

Connection diagramm



M30 x 130

Dimension (in mm)

Technical Specification

Signal type

Taster

Operating voltage

15 - 30 VDC

No load current

< 40 mA

Operating temperature

-15 ° C to 70 ° C

Repeat accuracy

+/- +/- 2 mm +/- 0,4%

Linearity

0,3 %

Operating state

LED

Analog output

Pulso\_has10-10V

Time delay

400 ms

Carrier frequency

130 kHz

Sound beam

ca. 8

Pulse rate of rise

teach in

Measuring range

30-350 cm

Short-circuit proof

yes

Overload protection

yes

Reverse voltage protection

yes

Protection category

IP67

EMC-level

DIN EN 60947-5-7:2004-06

Housing material

Plastic

Termination

2m PVC 3x0,34mm<sup>2</sup>

**Errors and omissions exceptet**