


[Article Page](#)

Product Description

ultrasonic sensor

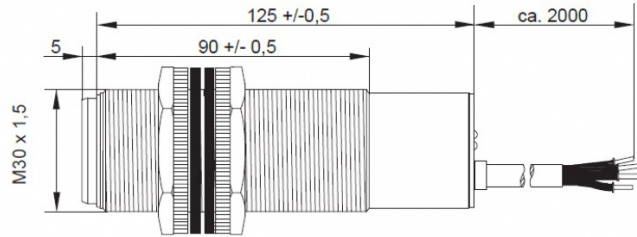

Name  
Order number  
Matchcode  
art\_schaltabstand\_einstellbar  
Switch type

KURT3500-M30KB125-DPSS  
08400832300  
9983-2300  
yes



Switchable


DC PNP

Signal Type  
Connection



Cable

Connection diagramm

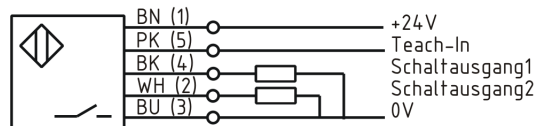

M30 x 130

Dimension (in mm)  
Technical Specification  
Signal type  
Operating voltage  
Max. load current  
No load current  
Switching frequency  
Operating temperature  
Repeat accuracy  
Operating state  
Switching state  
Carrier frequency  
Sound beam  
Measuring range  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Housing material  
Termination

Taster  
15 - 30 VDC  
500 mA  
< 35 mA  
1,2 Hz  
-15 ° C to 70 ° C  
+/- 0,2% / +/- 1,2 mm  
LED  
LED  
130 kHz  
ca. 8°  
30-350 cm  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-2:2008  
Plastic  
2m PVC 3x0,34mm<sup>2</sup>

**Errors and omissions exceptet**