
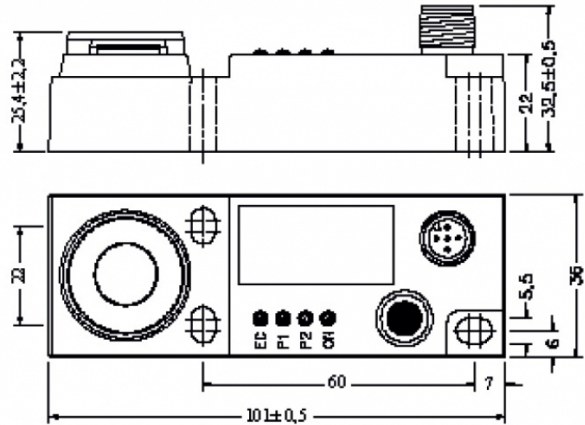


[Article Page](#)

Product Description


ultrasonic sensor

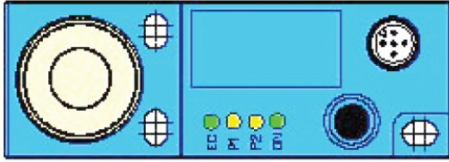


Name
Order number
Mounting

KURT3500-Q100KB-ANU-V2
08400834363


Switch type

 shielded

Signal Type
Connection

 analog
Analog Voltage

Dimension (in mm)
Technical Specification
Operating voltage
Operating temperature
Repeat accuracy

 Connector
36 x 32.5 x 101

Linearity
Switching state
Analog output
Time delay
Sound beam
Pulse rate of rise
Measuring range
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Termination

15 - 30 V DC
-20 ° C to 70 ° C
0,2%|2mm
< 0,5 %
LED
Pulso_has10-10V
400 ms
ca. 8
teach in
30-350 cm
yes
yes
yes
IP67
DIN EN 60947-5-7:2004-06/DIN EN 60947-5-2:2008
Plastic
Connector M12 5pol

Errors and omissions exceptet