


[Article Page](#)

Product Description

ultrasonic sensor

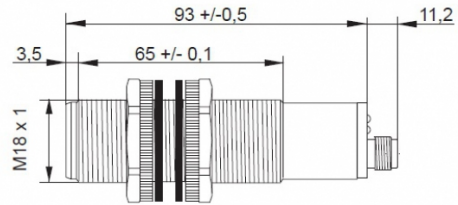

Name
Order number
Matchcode
art_schaltabstand_einstellbar
Switch type

KURT500-M18KB93-DPSS-V2
08400832263
9983-2263
yes



Switchable


Signal Type
Connection

DC PNP



Connector

Connection diagramm

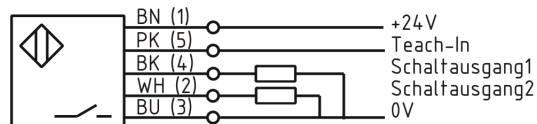

M18 x 93

Dimension (in mm)
Technical Specification
Signal type
Operating voltage
Max. load current
No load current
Switching frequency
Operating temperature
Repeat accuracy
Operating state
Switching state
Carrier frequency
Sound beam
Measuring range
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Termination

Taster
15 - 30 VDC
500 mA
< 35 mA
4,7 Hz
-15 ° C to 70 ° C
+/- 0,2% / +/- 0,5 mm
LED
LED
330 kHz
ca. 8°
6-50 cm
yes
yes
yes
IP67
DIN EN 60947-5-2:2008
Plastic
Connector M12 5pol

Errors and omissions exceptet