


[Article Page](#)

Product Description


ultrasonic sensor

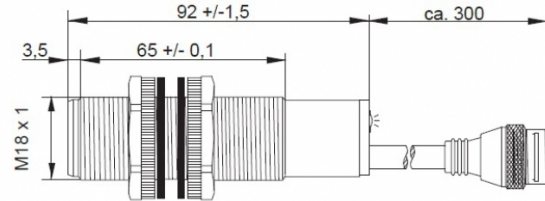

Name
Order number
Matchcode
art_schaltabstand_einstellbar
Switch type


KURT600-M18KB90-DPS-V2
08409843230
9984-3230
yes

Signal Type
Connection

 N.O.
DC PNP

Connection diagramm

 Connector

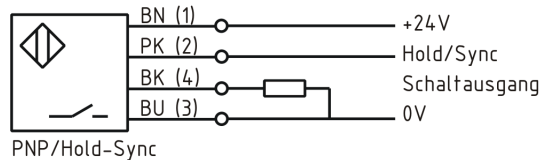

PNP/Hold-Sync

Dimension (in mm)
Technical Specification
Signal type
Operating voltage
Max. load current
Switching frequency
Switching hysteresis
Operating temperature
Repeat accuracy
Switching state
Carrier frequency
Sound beam
Measuring range
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Termination
Inhibit
Synchronisation
Enable

M18 x 95,5
Background suppression sensor
18 - 30 VDC
500 mA
20 Hz
2 %
-15 ° C to 70 ° C
0,2%/0,4mm
LED
300 kHz
ca. 8°
10-60 cm
yes
yes
yes
IP67
DIN EN 60947-5-2:2008
Plastic
0.3 m cable with Connector M12 4pole
Pink -> 0V
Pink -> Pin2
Pink not connected



KURT600-M18KB90-DPS-V2

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Errors and omissions exceptet