


[Article Page](#)

Product Description


ultrasonic sensor

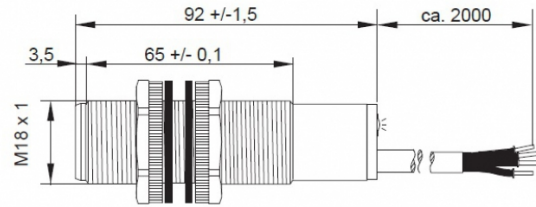


Name
Order number
Matchcode
art_schaltabstand_einstellbar
Switch type


KURT600-M18KB90-DPS
08409843200
9984-3200
yes

Signal Type
Connection

 N.O.
DC PNP

 Cable

Connection diagramm

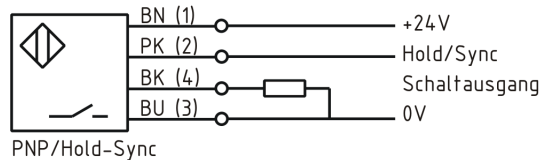

PNP/Hold-Sync
M18 x 95,5

Dimension (in mm)
Technical Specification
Signal type
Operating voltage
Max. load current
No load current
Switching frequency
Switching hysteresis
Operating temperature
Repeat accuracy
Switching state
Carrier frequency
Sound beam
Measuring range
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Termination
Inhibit
Synchronisation
Enable

Background suppression sensor
18 - 30 VDC
500 mA
35 mA
20 Hz
2 %
-15 ° C to 70 ° C
0,2% / 0,4mm
LED
300 kHz
ca. 8°
10-60 cm
yes
yes
yes
IP67
DIN EN 60947-5-2:2008
Plastic
2 m cable 4 pole
Pink -> 0V
Pink -> Pin2
Pink not connected



KURT600-M18KB90-DPS

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Errors and omissions exceptet