
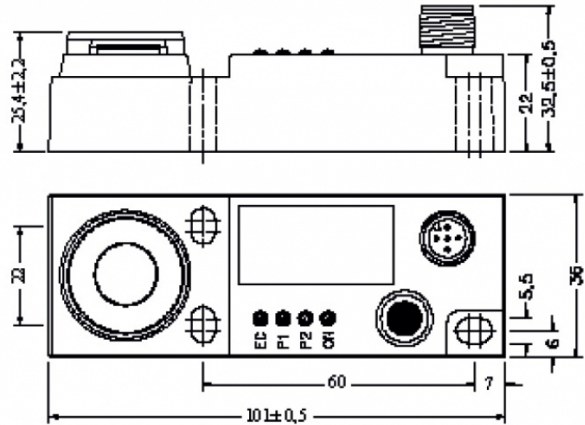


[Article Page](#)

Product Description


ultrasonic sensor

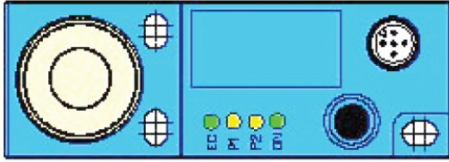

Name  
Order number  
Mounting

KURT800-Q100KB-ANU-V2  
08400834163


Switch type

 shielded

Signal Type  
Connection

 analog  
Analog Voltage

Dimension (in mm)  
Technical Specification

 Connector  
36 x 32.5 x 101

Operating voltage  
Max. load current  
Operating temperature  
Repeat accuracy

15 - 30 V DC  
40 mA  
-15 ° C to 70 ° C  
+/- 1mm|+/-0,2 %

Linearity  
Switching state

< 0,3 %  
LED  
Pulso\_has10-10V

Analog output  
Time delay

100 ms  
ca. 8  
teach in  
10-80 mm

Sound beam  
Pulse rate of rise

yes  
yes  
yes

Measuring range  
Short-circuit proof  
Overload protection  
Reverse voltage protection

yes  
yes  
yes  
IP67  
DIN EN 60947-5-7:2004-06/DIN EN 60947-5-2:2008

EMC-level

Housing material

Plastic

Termination

Connector M12 5pol

**Errors and omissions exceptet**