
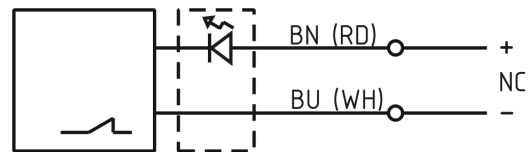


Name
Order number
Switch type

P10DHB-TBWL
08430241005

Signal Type
Connection
Connection diagramm

 N.C.
mechanical contact
Cable 3m



Dimension (in mm)
Technical Specification
Operating voltage
Max. load current
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy

fine-pitch thread M14x0,5 x l = 54,5

5 - 24 V DC
10 mA
0
0 ° C to 80 ° C
0
0,0005 mm (at operating speed 50 ... 200 mm/min)

Switching state
Stroke
Pre-travel
Accuracy
Probe tip
Probe tip material
Operation load
art_ttl_mech
Protection category
Wiring
Housing material
Termination
Approach direction

LED
3 mm
0 mm
0,0005 mm
Fläche 3
Wolframkarbid
1 N
3 Mio. operating cycles
IP67
Zweidraht/ Two wire
Stainless steel V2A
cable 3 m, 2 wire, Ø 5 mm, oil resistant
axial

Errors and omissions exceptet