
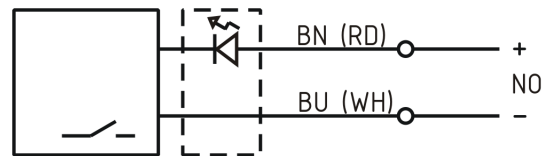


Name
Order number
Switch type

P10MCA-L
08430231001

Signal Type
Connection
Connection diagramm

 N.O.
mechanical contact
Cable 3m



fine-pitch thread M10x0,5 x l = 43,7

Dimension (in mm)
Technical Specification
Operating voltage
Max. load current
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy

5 - 24 V
10 mA
0
0 ° C to 80 ° C
0
0,002 mm (at operating speed 50 ... 200 mm/
min)

Switching state
Stroke
Pre-travel
Accuracy
Probe tip
Probe tip material
Operation load
art_ttl_mech
Protection category
Wiring
Housing material
Termination
Approach direction

LED
1,2 mm
0,3 mm
0,002 mm
Kugel 5
Wolframkarbid
1 N
3 Mio. operating cycles
IP40
Zweidraht/ Two wire
Stainless steel V2A
cable 3 m, 2 wire, Ø 4 mm, oil resistant
axial and radial

Errors and omissions exceptet