
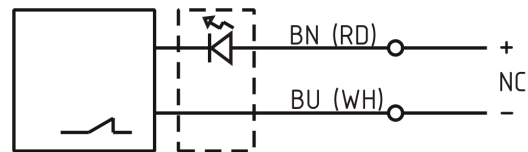


Name  
Order number  
Switch type

P10MCB-L  
08430231002

Signal Type  
Connection  
Connection diagramm

 N.C.  
mechanical contact  
Cable 3m



fine-pitch thread M10x0,5 x l = 35,9

Dimension (in mm)  
Technical Specification  
Operating voltage  
Max. load current  
Switching hysteresis  
Operating temperature  
Temperature drift  
Repeat accuracy

5 - 24 V  
10 mA  
0  
0 ° C to 80 ° C  
0  
0,002 mm (at operating speed 50 ... 200 mm/  
min)

Switching state  
Stroke  
Pre-travel  
Accuracy  
Probe tip  
Probe tip material  
Operation load  
art\_ttl\_mech  
Protection category  
Wiring  
Housing material  
Termination  
Approach direction

LED  
1,2 mm  
0 mm  
0,002 mm  
Kugel 5  
Wolframkarbid  
1 N  
3 Mio. operating cycles  
IP40  
Zweidraht/ Two wire  
Stainless steel V2A  
cable 3 m, 2 wire, Ø 4 mm, oil resistant  
axial and radial

**Errors and omissions exceptet**