


[Article Page](#)

Product Description  
 Name  
 Order number  
 Switching distance  
 Mounting

capacitive sensor DC  
 SC30-M30MN90-DPÖ-V2  
 08323303022  
 30 mm

 non shielded


Switch type

 N.C.  
 DC PNP

Signal Type  
 Connection

 Connector

Connection diagramm

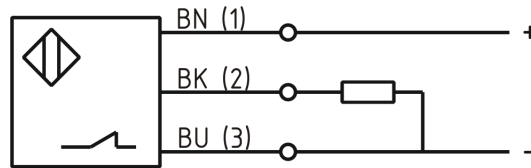

fine-pitch thread M30 x 90

Dimension (in mm)  
 Technical Specification

Operating voltage  
 Max. ripple  
 Voltage drop  
 Max. load current  
 No load current  
 Leakage current  
 Switching frequency  
 Switching hysteresis  
 Operating temperature  
 Temperature drift  
 Repeat accuracy  
 Switching state  
 Digital output  
 Short-circuit proof  
 Overload protection  
 Reverse voltage protection  
 Protection category  
 EMC-level  
 Material active face  
 Termination

10 - 30 VDC  
 $\leq 10 \%$   
 2 V  
 200 mA  
 $\leq 10 \text{ mA}$   
 $\leq 10 \mu\text{A}$   
 100  
 $\leq 15 \%$   
 -25 ° C to 70 ° C  
 $\leq 10 \%$   
 $\leq 5 \%$   
 LED  
 yes  
 yes  
 yes  
 IP67  
 DIN EN 60947-5-2:2008  
 PBT  
 Connector M12 4pol

**Errors and omissions exceptet**