



[Article Page](#)

Product Description

inductive sensor DC

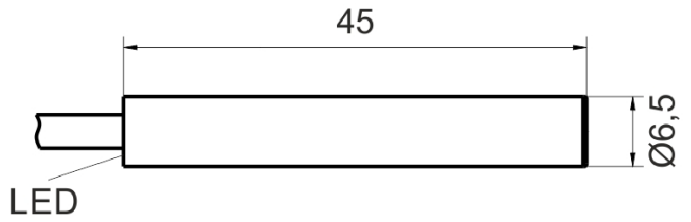

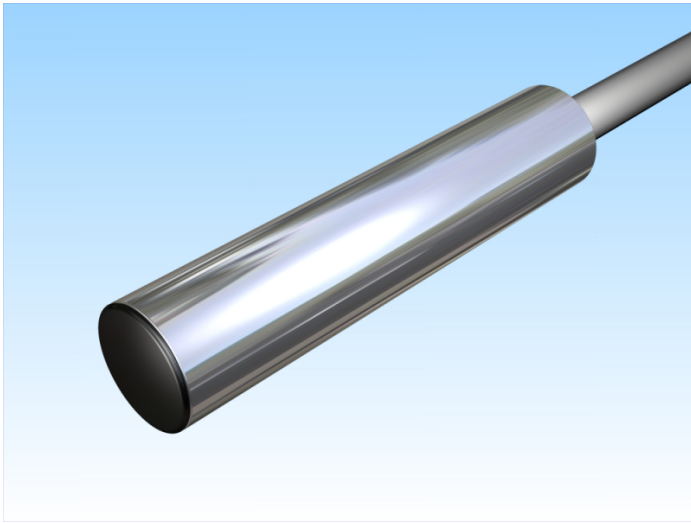

Name
Order number
Switching distance
Mounting


Switch type


Signal Type
Connection

Connection diagramm

SJ1,5-G6,5EB45-DPA
08313651564
1,5 mm

 shielded
 Changeover
 DC PNP

 Cable

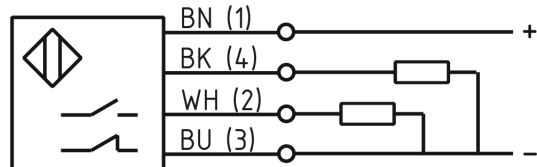

D 6,5 x 45

Dimension (in mm)
Technical Specification
Operating voltage
Max. ripple
Voltage drop
Max. load current
No load current
Leakage current
Switching frequency
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy
Switching state
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Material active face
Cable length

10 - 30 VDC
 $\leq 10 \%$
 2,4 V
 200 mA
 $\leq 10 \text{ mA}$
 $\leq 10 \mu\text{A}$
 2000
 $\leq 15 \%$
 -25 ° C to 75 ° C
 $\leq 10 \%$
 $\leq 5 \%$
 LED
 yes
 yes
 yes
 IP67
 DIN EN 60947-5-2: 2008
 Stainless steel V2A
 POM
 2 m



SJ1,5-G6,5EB45-DPA

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Utilisation category
Cable material
Cable cross

DC 13
PVC grau LIYY
3x0.14 mm²

Errors and omissions excepted