



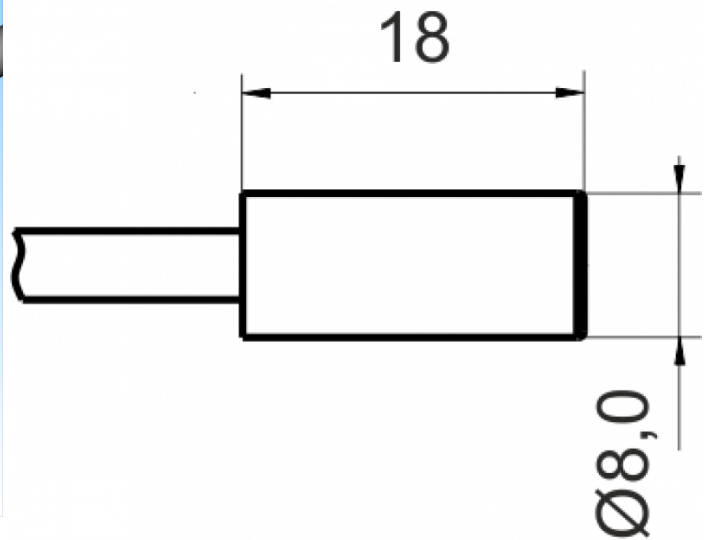

[Article Page](#)


Product Description

inductive sensor DC

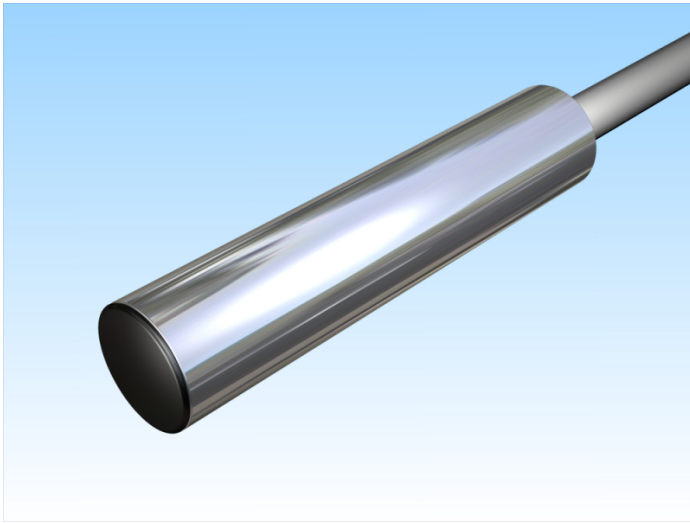

Name  
 Order number  
 Switching distance  
 Mounting  
  
 Switch type  
  
 Signal Type  
 Connection  
 Connection diagramm

SJ1,5-G8EB18-DPS  
 08313680151  
 1,5 mm  
 shielded  
 N.O.  
 DC PNP  
 Cable 2m

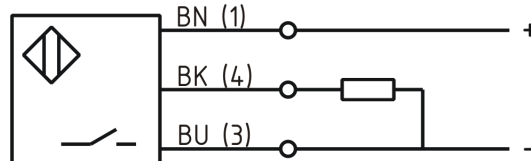

D 8 x 18

Dimension (in mm)  
 Technical Specification  
 Operating voltage  
 Max. ripple  
 Voltage drop  
 Max. load current  
 No load current  
 Leakage current  
 Switching frequency  
 Switching hysteresis  
 Operating temperature  
 Temperature drift  
 Repeat accuracy  
 Switching state  
 Time delay  
 Short-circuit proof  
 Overload protection  
 Reverse voltage protection  
 Protection category  
 EMC-level  
 Housing material  
 Material active face

10 - 30 VDC  
 ≤ 10 %  
 1 V  
 200 mA  
 ≤ 10 mA  
 ≤ 10 µA  
 2000  
 ≤ 15 %  
 -25 ° C to 70 ° C  
 ≤ 10 %  
 ≤ 1 %  
 LED  
 100 ms  
 yes  
 yes  
 yes  
 IP67  
 DIN EN 60947-5-2:2008  
 Stainless steel V2A  
 POM



## SJ1,5-G8EB18-DPS

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Cable length	2 m
Utilisation category	DC13
Cable material	PUR LIY11Y grau (gre
Cable cross	3x0.14 mm <sup>2</sup>

**Errors and omissions exceptet**