



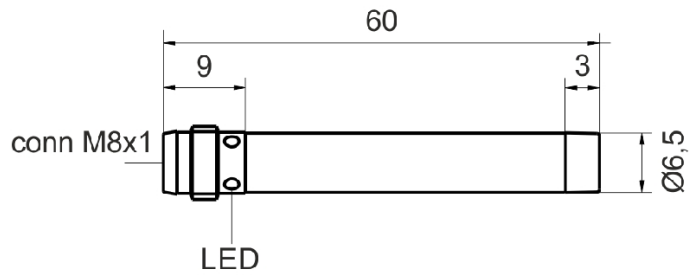

[Article Page](#)


Product Description

inductive sensor DC

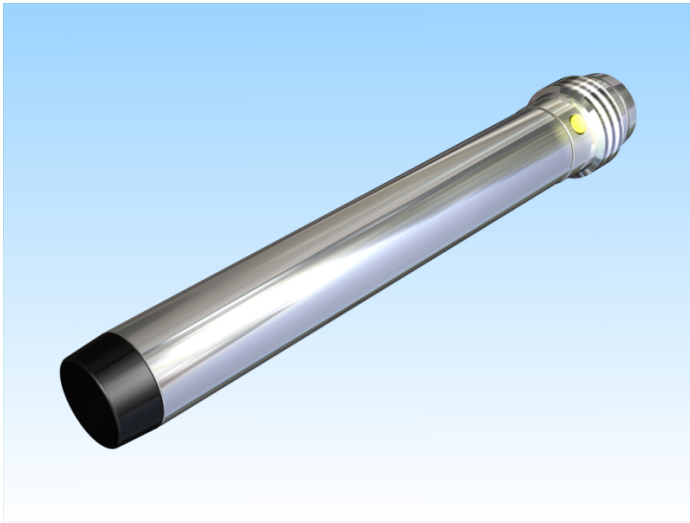

Name  
Order number  
Switching distance  
Mounting  
  
Switch type  
  
Signal Type  
Connection  
Connection diagramm

SJ6-G6,5MN60-DPÖ-V1  
08313066521  
6 mm  
  
 non shielded  
  
 N.C.  
DC PNP  
connector M8

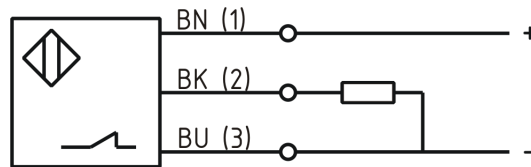

D 6,5 x 60

Dimension (in mm)  
Technical Specification  
Operating voltage  
Max. ripple  
Voltage drop  
Max. load current  
No load current  
Leakage current  
Switching frequency  
Switching hysteresis  
Operating temperature  
Temperature drift  
Repeat accuracy  
Switching state  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Housing material  
Material active face  
Utilisation category  
Termination

10 - 30 VDC  
≤ 10 %  
1 V  
200 mA  
≤ 10 mA  
≤ 10 µA  
1000  
≤ 15 %  
-25 ° C to 70 ° C  
≤ 10 %  
< 2 %  
LED  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-2: 2008  
Brass, nickel plated  
POM  
DC 13  
Connector M8 3pin

**Errors and omissions exceptet**