
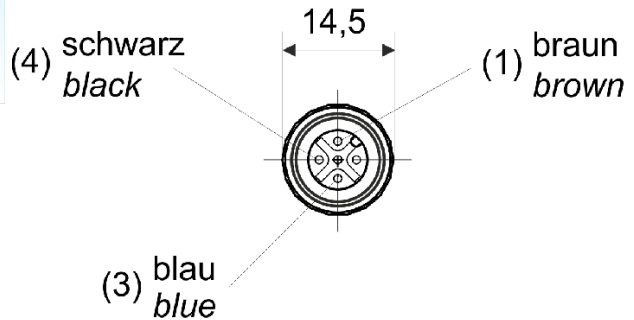


[Article Page](#)

Product Description

connector M12

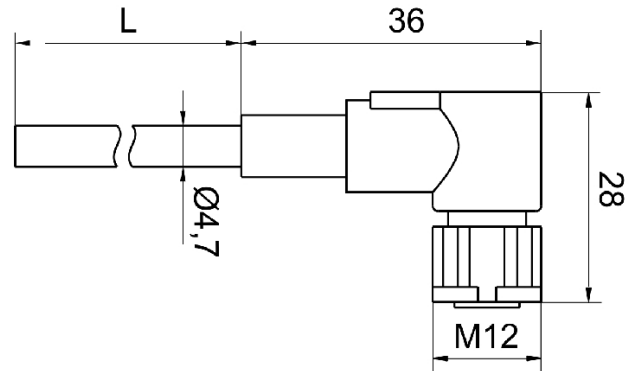

Name

V2-3/W/P/6m


Order number

44505126513

Matchcode

9512-6513

Connection

 Socket  
gewinkelt

Leaving

Technical Specification

Special features

Flexible cable conduit capable

Silicone-free

Max. load current

4 A

Operating temperature

-25 ° C to 80 ° C

Protection category

IP 68

Cable

offen

Number of terminals

3

Contact resistance

≤ 5 mΩ

Isolation resistance

≥ 100 MΩ

Cable length

6 m

Utilisation category

3

Contact durability

≥ 100

Contact material

CuSn

Contact surface material

Ni/Au

Contact holder

PUR

Shell type material

PUR

Knurled nut material

Messing vernickelt

Sealing material

NBR

Cable material

PUR

Cover material

Li9Y11Y

Wire isolation material

TPM

Wire material

Cu Litze

Wiring diameter

3x0,34

Signal wire structure

42x0,10mm

Conductor diameter

1,27 mm 0,02 mm

Outer cover diameter	4,30 mm ± 0,2 mm
Conductor colour	braun, blau, schwarz
Cover colour	schwarz
Wire resistance	max. 58Ω/km
Nominal operating voltage	24 V
Test voltage unit	3000 V
Flame-retardant	nach UL-Style 20549
Halogen-free	nach DIN VDE 0472 Teil 815
Oil-resistant	nach DIN EN 60811-2-1
Other resistances	Highly resistant to acids, alkaline solutions and solvents, hydrolisis and microbe resistant

**Errors and omissions exceptet**