


VARIMETER Frequency Relay IK 9143, SK 9143

Translation
of the original instructions

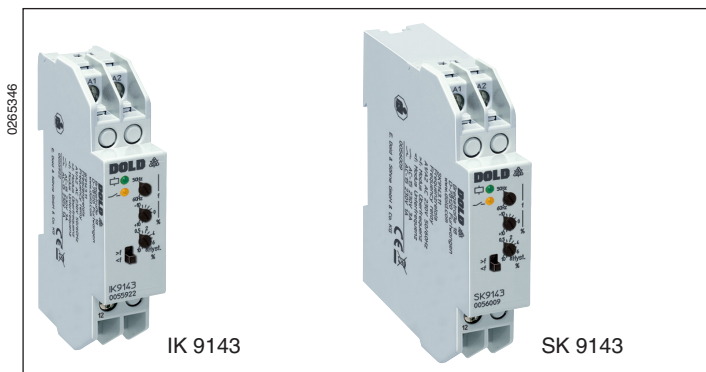


Your Advantages

- Easy setting
- Without auxiliary voltage


Features

- According to IEC/EN 60255-1
- Monitoring of overfrequency and underfrequency (selectable) in A.C. power systems
- Selection of frequency range for 50 or 60 Hz systems
- Adjustable response value
- Adjustable hysteresis
- De-energized on trip (output relay not activated in case of error)
- LED indicators for measuring voltage and contact position
- 1 changeover contact
- As option energized on trip (output relay activated in case of error)
- Devices available in 2 enclosure versions:
 - IK 9143: Depth 58 mm, with terminals at the bottom for installation systems and industrial distribution systems according to DIN 43880
 - SK 9143: Depth 98 mm, with terminals at the top for cabinets with mounting plate and cable duct
- 17.5 mm width

Function Diagram

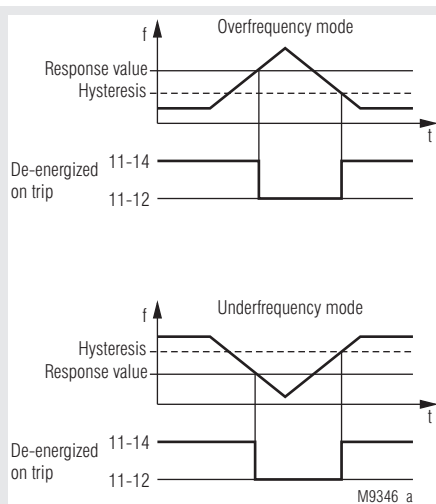

Circuit Diagrams

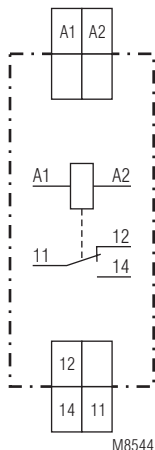

Connection Terminals

Terminal designation	Signal description
A1, A2	Supply voltage / measuring voltage
11, 12, 14	Changeover contact

Approvals and Markings



Applications

Frequency monitoring function in in-plant generation units and local power supply systems

Function

The system to be monitored is connected to the terminals A1-A2. Its internal supply voltage is also taken from these terminals. The input frequency is compared to response value to be set at the unit.

In overfrequency mode, the output relay switches into alarm position when the preset response value is exceeded. When the system frequency once more falls below the response value minus the preset hysteresis, the output relay will switch back into normal position.

In underfrequency mode, the output relay switches into alarm position when the actual value falls below the preset response value. When the system frequency once more exceeds the response value plus hysteresis, the output relay will switch back into normal position.

If de-energized on trip is selected, the output relay is energized (11-14 closed) in normal status.

If energized on trip is selected, the output relay is energized (11-14 closed) in alarm status.

Indicators


Green LED: On, when measuring voltage is connected to A1 - A2

Yellow LEDs: On, when the output relay is energized (contacts 11-14 closed)

Notes

Monitoring mode underfrequency or overfrequency
The mode can be selected by means of the slide switch at the front of the unit. The operating mode de-energized or energized on trip as well as the response value do not change.

Setting

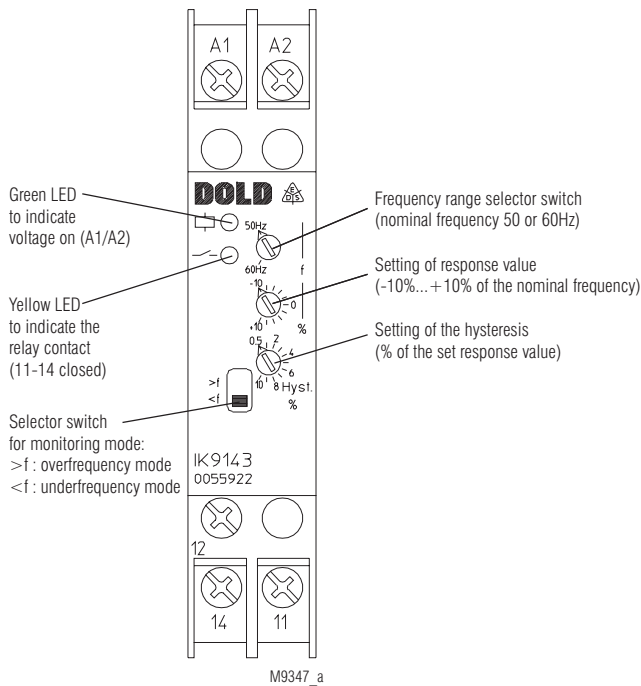

Technical Data

Input

Nominal voltage U_n:	AC 110, 230, 400 V
Voltage range:	0.8 ... 1.1 U_n
Nominal consumption:	
AC 110 V:	Approx. 3 VA
AC 230 V:	Approx. 5 VA
AC 400 V:	Approx. 8 VA
Frequency range:	50/60 Hz, selectable with rotary switch
Response value	
Infinitely adjustable:	- 10 ... + 10 % of the selected frequency range
Hysteresis	
Infinitely adjustable:	0.5 ... 10% of the set response value

Output

Contacts:	1 changeover contact
Thermal current I_n:	4 A
Switching capacity	
To AC 15	
NO contact:	3 A / AC 230 V IEC/EN 60947-5-1
NC contact:	1 A / AC 230 V IEC/EN 60947-5-1
To DC 13	
NO contact:	1 A / DC 24 V IEC/EN 60947-5-1
NC contact:	1 A / DC 24 V IEC/EN 60947-5-1
Contact life:	
To AC 15 with 1 A, AC 230V:	> 1.5 x 10 ⁵ switch. cycl. IEC/EN 60947-5-1
Short circuit strength	
max. fuse rating:	4 A gG / gL IEC/EN 60947-5-1
Mechanical life:	≥ 30 x 10 ⁶ switching cycles

General Data

Nominal operation:	Continuous
Temperature range	
Operation:	- 20 ... + 60 °C
Storage:	- 20 ... + 60 °C
Altitude:	< 2000 m
Clearance and creepage distances	
Rated impulse voltage / Pollution degree:	4 kV / 2 IEC 60664-1

Technical Data

EMC

Electrostatic discharge (ESD):	8 kV (air discharge)	IEC/EN 61000-4-2
HF irradiation		
80 MHz ... 1 GHz:	12 V/m	IEC/EN 61000-4-3
1 GHz ... 2.7 GHz:	10 V/m	IEC/EN 61000-4-3
Fast transients:	4 kV	IEC/EN 61000-4-4

Surge voltage

Between wires for power supply:	1 kV	IEC/EN 61000-4-5
HF-wire guided:	10 V	IEC/EN 61000-4-6
Interference suppression:	Limit value class B	EN 55011

Degree of protection:

Housing:	IP 40	IEC/EN 60529
Terminals:	IP 20	IEC/EN 60529

Housing:

Thermoplast with V0 behavior according to UL Subject 94	
Amplitude 0.35 mm	
Frequency 10 ... 55 Hz, IEC/EN 60068-2-6	IEC/EN 60068-1
20 / 060 / 04	
EN 50005	

Terminal designation:

Cross section:	2 x 0.6 ... 2.5 mm ² solid or 2 x 0.28 ... 1.5 mm ² stranded wire with and without ferrules
----------------	---

Stripping length:

Wire fixing:

Plus-Minus-terminal screws M3,5 with self-lifting clamping piece	
0.8 Nm	

Fixing torque:

Mounting:

DIN rail mounting (IEC/EN 60715) or screw mounting M4, 90 mm hole pattern, with additional clip available as accessory	
--	--

Net weight

IK 9143:	Approx. 65 g
SK 9143:	Approx. 83 g

Dimensions

Width x height x depth

IK 9143:	17.5 x 90 x 58 mm
SK 9143:	17.5 x 90 x 98 mm

Standard Type

IK 9143.11	50 / 60 Hz	± 10 %	AC 230 V	Hyst. 0.5 ... 10 %
Article number:				0055922

- De-energized on trip
- Selection of overvoltage or undervoltage
- Selectable frequency range: 50 or 60 Hz
- Response value: ± 10 % adjustable
- Nominal voltage U_n : AC 230 V
- Hysteresis: 0.5 ... ± 10 % adjustable
- Width: 17.5 mm

Variants

IK 9143.11/001,	
SK 9143.11/001:	Energized on trip

Ordering example for variants

IK 9143	.11	/	---	50 / 60 Hz	± 10 %	AC 230 V	0.5 ... 10 %
							Hysteresis
							Nominal voltage
							Response value
							Frequency range
							Variant, if required
							Contacts
							Type