

[Article Page](#)

Product Description

Name

Order number

Matchcode

Switch type

Signal Type

Illuminant

Connection

Connection diagramm

fibre optic device

KOLLEG-Q31KB-DMU-V2-IR

08363260506

MP-TGFD-CX9Q4UE




Switchable

DC PNP/NPN

**IR** Infrared light 880 nm



Connector

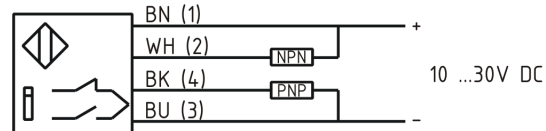

12 x 31 x 30

Dimension (in mm)

Technical Specification

Signal type

Operating voltage

Max. load current

No load current

Switching frequency

Operating temperature

Switching state

Digital output

Sensitivity adjustable

Sensing range adjustable

Short-circuit proof

Overload protection

Reverse voltage protection

Protection category

EMC-level

Housing material

Termination

Notes

Fibre-optic sensor

10 - 30 V DC

150 mA

< 25 mA

500

-25 ° C to 70 ° C

LED

ja

nein

yes

yes

yes

yes

IP67

DIN EN 60947-5-2:2008

Plastic

Connector M12 4pol

Glasfaser-Einweglichtschranke

**Errors and omissions excepted**