


[Article Page](#)

Product Description


ultrasonic sensor

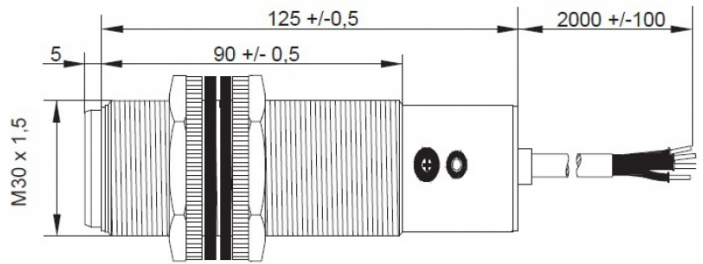


Name  
Order number  
Matchcode  
Switch type


KURT2500-M30KB106-ANU  
08409861300  
9986-1300

Signal Type  
Connection

 analog  
Analog Voltage

Connection diagramm

 Cable

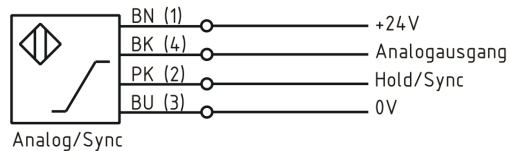

Dimension (in mm)  
Technical Specification  
Signal type  
Operating voltage  
No load current  
Operating temperature  
Repeat accuracy  
Linearity  
Time delay  
Carrier frequency  
Sound beam  
Pulse rate of rise  
Measuring range  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Housing material  
Termination  
Inhibit  
Synchronisation  
Enable

M30 x 130  
Taster  
18 - 30 VDC  
35 mA  
-15 ° C to 70 ° C  
0,2 %  
0,3 %  
200 ms  
130 kHz  
ca. 8°  
fix  
30-250 cm  
yes  
yes  
IP67  
DIN EN 60947-5-7:2004-06  
Plastic  
2 m cable 4 pole  
Pink -> 0V  
Pink -> Pin2  
Pink not connected



## KURT2500-M30KB106-ANU

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

**Errors and omissions excepted**